

EARTH RESISTANCE TESTER MS2302

MS2302

RESISTANCE
0.01~4000Ω

VOLTAGE
0~300V



AUTO **MEM** **MAX MIN**

AVG **2 Pole** **3 Pole**


REL **0.01** **Apo**



EMC
LVD



◆ Test Connection Diagram (2 Pole)

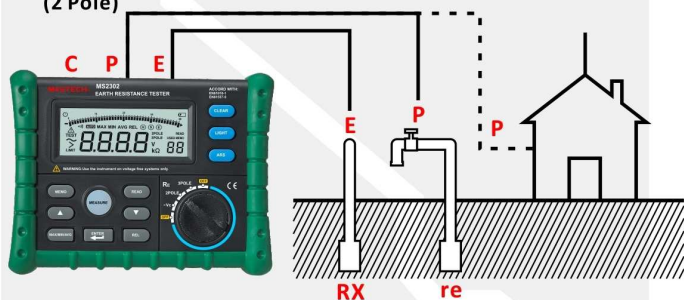

◆ Connect the test leads to the meter as follows (3 Pole)



Specifications

MS2302

Specifications	Range	Resolution	Accuracy
Earth Ground Resistance	0~29.99Ω	0.01Ω	±(2%+6)
	30~99.9Ω	0.1 Ω	±(3%+3)
	100~999Ω	1 Ω	±(3%+3)
	1.00~4.00kΩ	10 Ω	±(3%+3)
Measuring Voltage to Earth	0~200V (50Hz~60Hz)	0.1V	±(1%+5)

Features

Auto Ranging	Auto and Manual	●
APO	Auto Power Off	●
Segments Bar Graph		●
MAX/MIN/AVG		●
Continuity Test		●
REL	Relative Measurement	●
Data Logging	99 groups	●
Display Backlight		●
LBD	Low Battery Display	●

General

Power Supply	6×1.5V AA Batteries
Product Size	330mm×265mm×125mm/13"×10.4"×4.9"
Product Weight	3.45kg/7.6lb
Safety Rating	CE ETL CAT III 300V